


SEGA


N - SUB

Service Manual & Parts Catalog

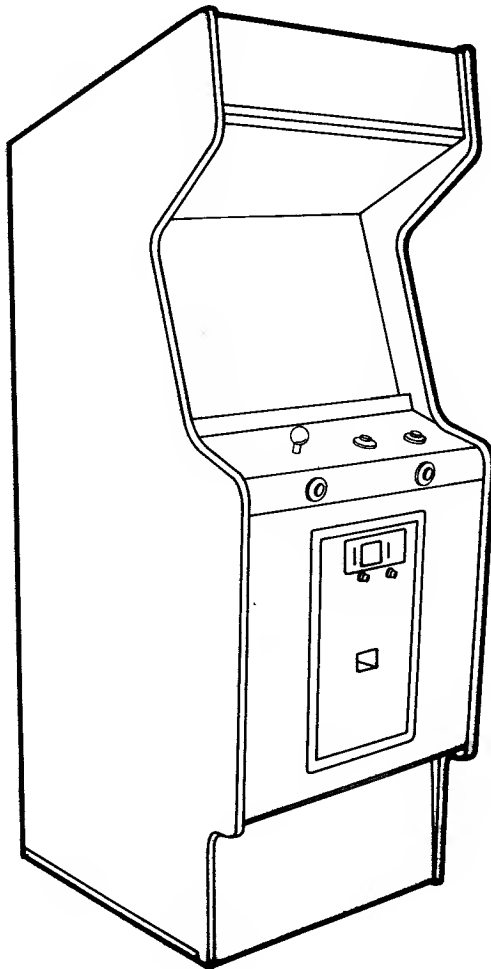

SEGA ENTERPRISES LTD.


3. IC Board (97201-P) Adjustments Coin Calculator

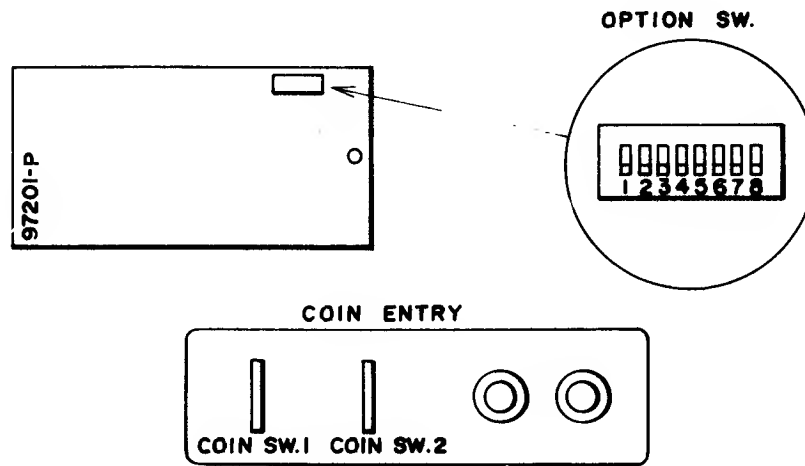



		ON: 0 OFF: X							
		OPTION							
COIN SW. 1	COIN SW. 1	1 Coin 1 Play	0	X	X				
		2 Coins 1 Play	X	0	X				
		3 Coins 1 Play	0	0	X				
		4 Coins 1 Play	X	X	0				
		5 Coins 1 Play	0	X	0				
		6 Coins 1 Play	X	0	0				
		7 Coins 1 Play	0	0	0				
COIN SW. 2	COIN SW. 2	1 Coin 1 Play	0	X	X				0
		2 Coins 1 Play	X	0	X				0
		3 Coins 1 Play	0	0	X				0
		4 Coins 1 Play	X	X	0				0
		5 Coins 1 Play	0	X	0				0
		6 Coins 1 Play	X	0	0				0
		7 Coins 1 Play	0	0	0				0
COIN SW. 2	COIN SW. 2	1 Coin 1 Play				0	X	X	X
		1 Coin 2 Plays				X	0	X	X
		1 Coin 3 Plays				0	0	X	X
		1 Coin 4 Plays				X	X	0	X
		1 Coin 5 Plays				0	X	0	X
		1 Coin 6 Plays				X	0	0	X
		1 Coin 7 Plays				0	0	0	X

NOT USED




Cabinet Accessory Assy

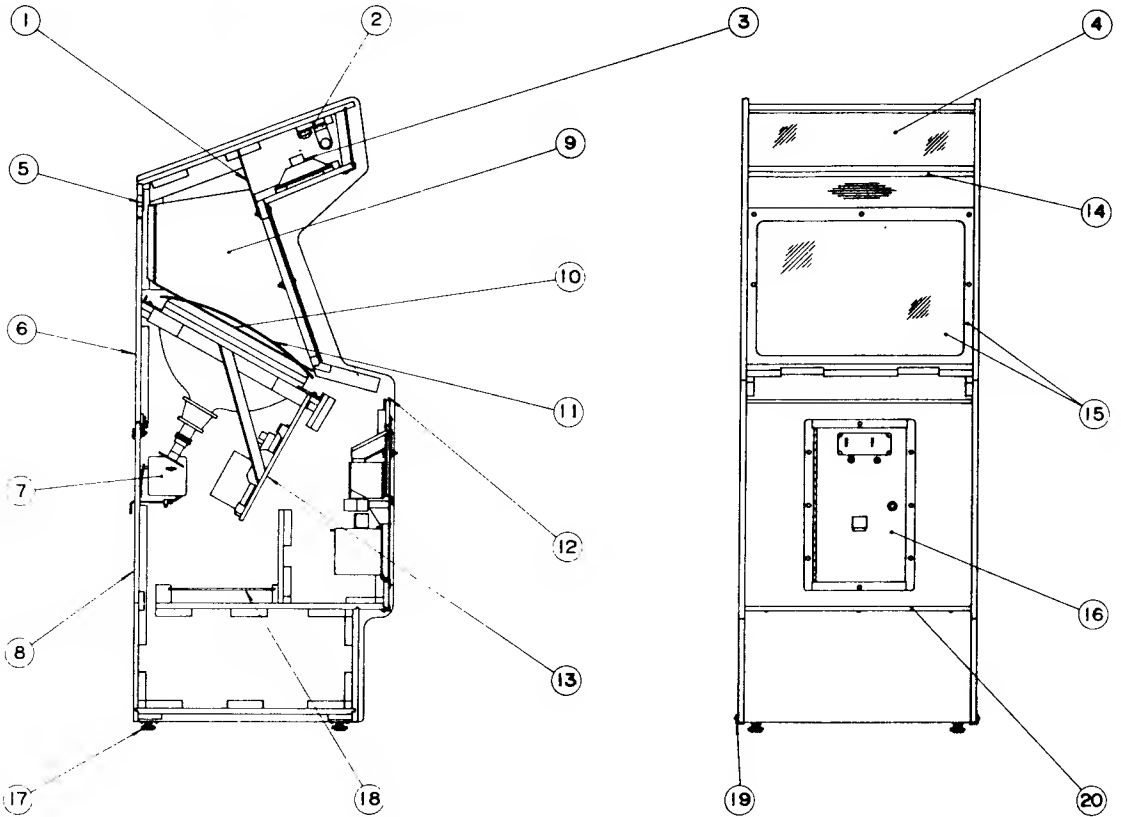

- 1 MR-1015 Light Baffle
- 2 NS-1039 FLUORESCENT LIGHT ASSY,15W
- 3 MR-1009 Speaker Guard Plate
- 4 NS-1028 S-97336 Fluorescent Light,15W
- 5 TA-1065X Speaker,230 x 150mm,8Ω,6W
- 6 PT-0015 Top Panel
- 7 MR-1002 Nut Plate
- 8 NS-1038 Net
- 9 NS-1034 Back Door,Upper
- 10 NS-1035 JUNCTION BOX ASSY
- 11 NS-1033 JUNCTION BOX ASSY,200~240V
- 12 MR-1019 (See Page 14 for Detail)
- 13 NS-1037 Back Door,Lower
- 14 NS-1034 Scenery,Right
- 15 NS-1035 Scenery,Left
- 16 NS-1033 Scenery,Rear
- 17 MR-1024 TV Mask
- 18 MR-1005 Trim,Upper
- 19 97232-P COLOR DISPLAY ASSY,20TYPE,120V
- 20 97397-P COLOR DISPLAY ASSY,20TYPE,100V
- 21 MR-1007 Ornament Frame
- 22 MR-1013 Window Panel
- 23 MR-1014 Bezel Frame
- 24 MR-1200 COIN CHUTE DOOR & CASH BOX ASSY
- 25 (See Page 16 for Detail)
- 26 M-163-4(L) Leg Adjuster
- 27 Leg Adjuster Bracket
- 28 97399-P-16 IC BOARD ASSY, N-SUB
- 29 NS-1036 Corner Protector
- 30 MR-1006 Trim,Lower

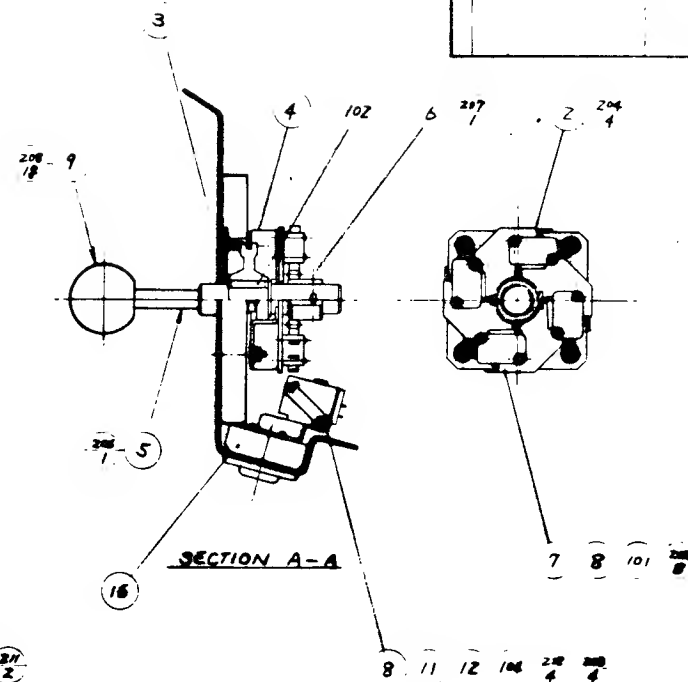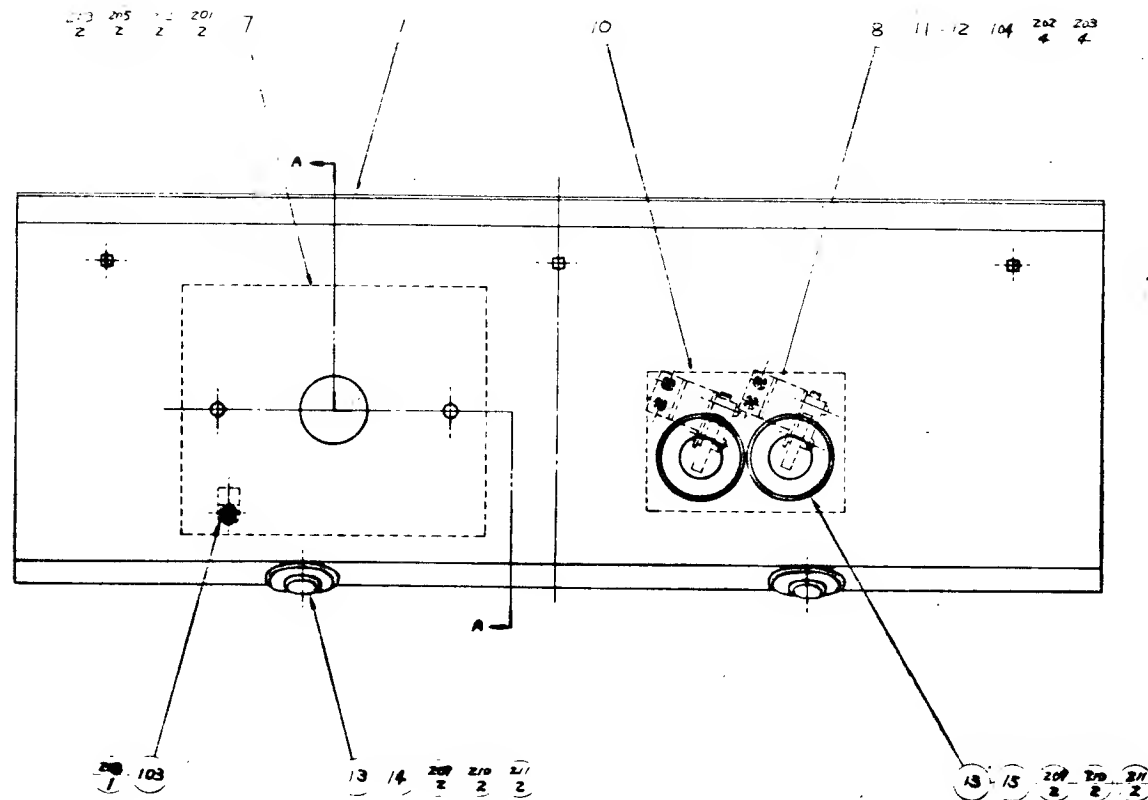


SEGA ENTERPRISES LTD.		THIS DRAWING WILL IN NO WAY BE COPIED TO BE USED FOR REPAIR OR DEMAND	
LIMITS UNLESS OTHERWISE SPECIFIED		SCALE 1/2	APR 1971
MATERIAL		HEAT TREAT	FINISH
REPAIR		REPAIR	

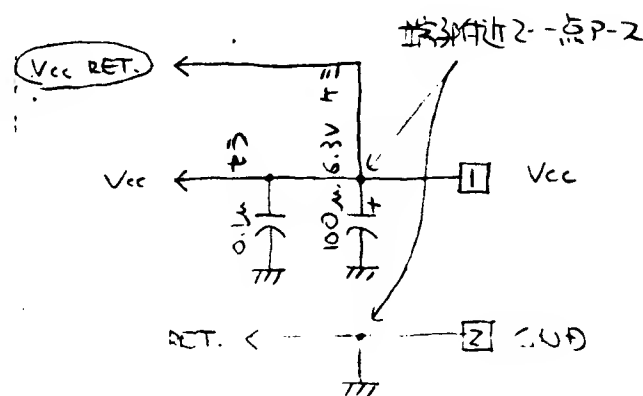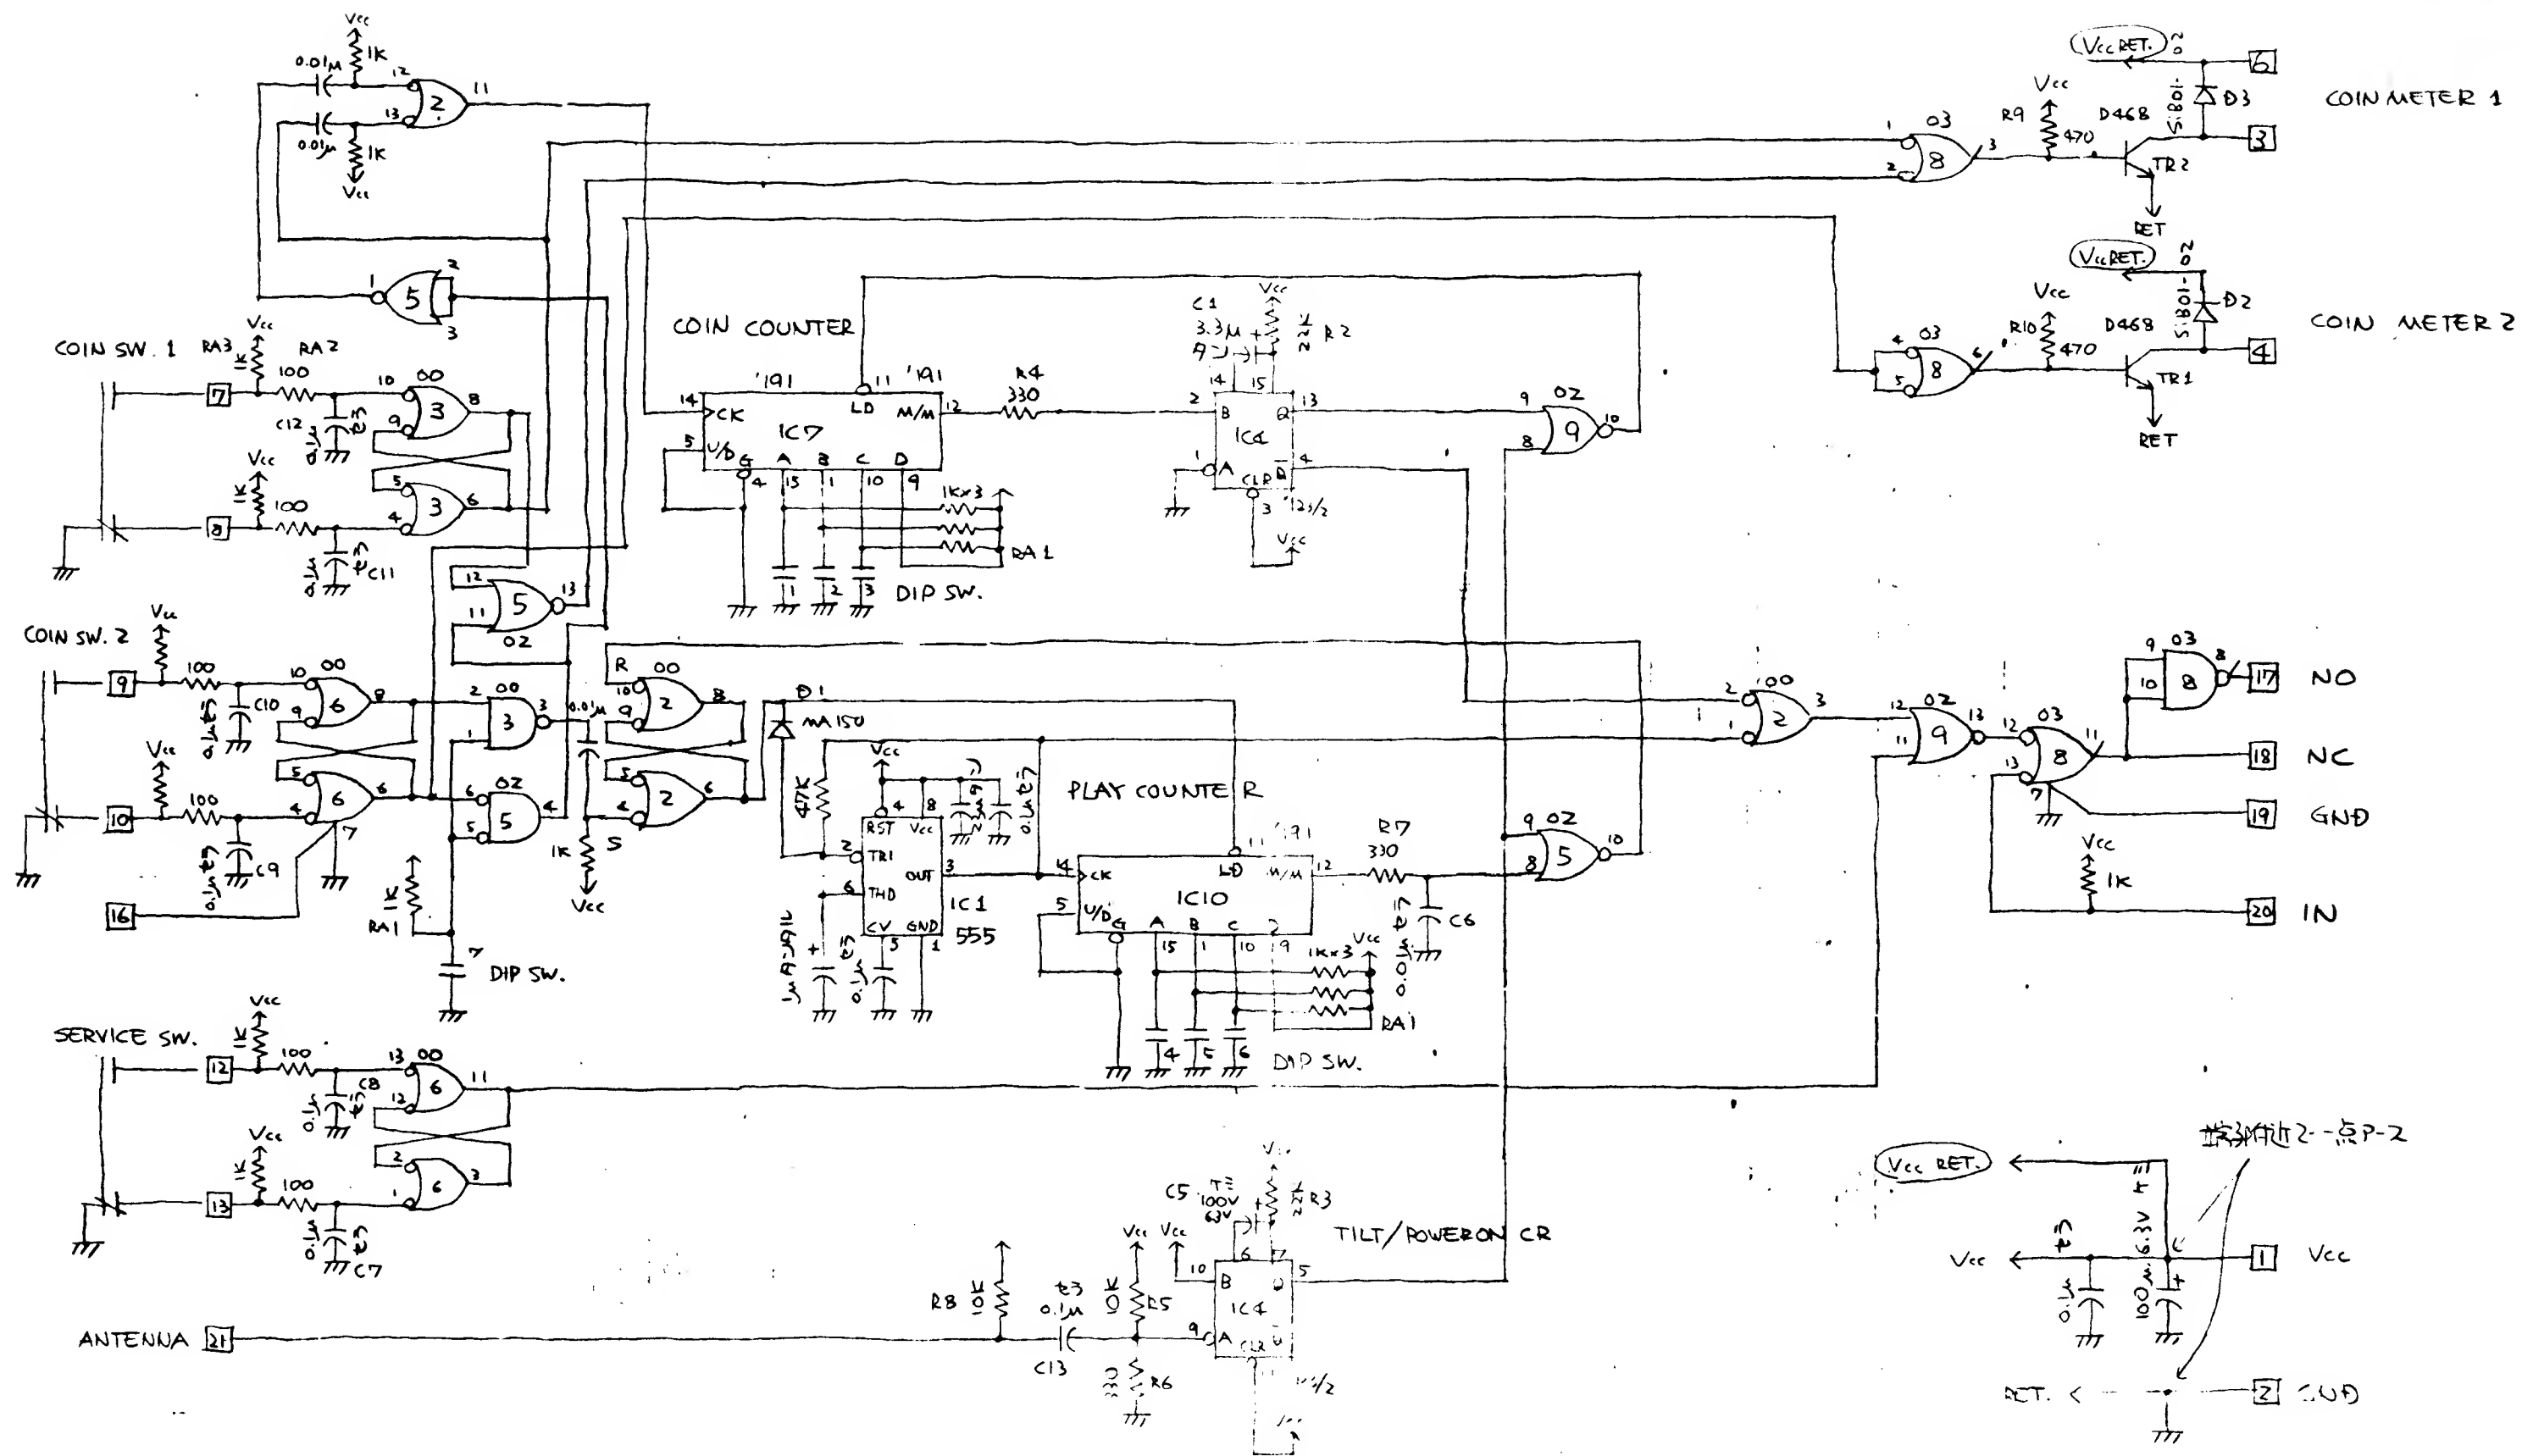


37201-P COIN CALCULATOR LOGIC DIAGRAM

△ C1 0.01VOLD. 100V
△ 1/17-20
1/22-30
1/25-30

10.31232MHZ
15.46848MHZ

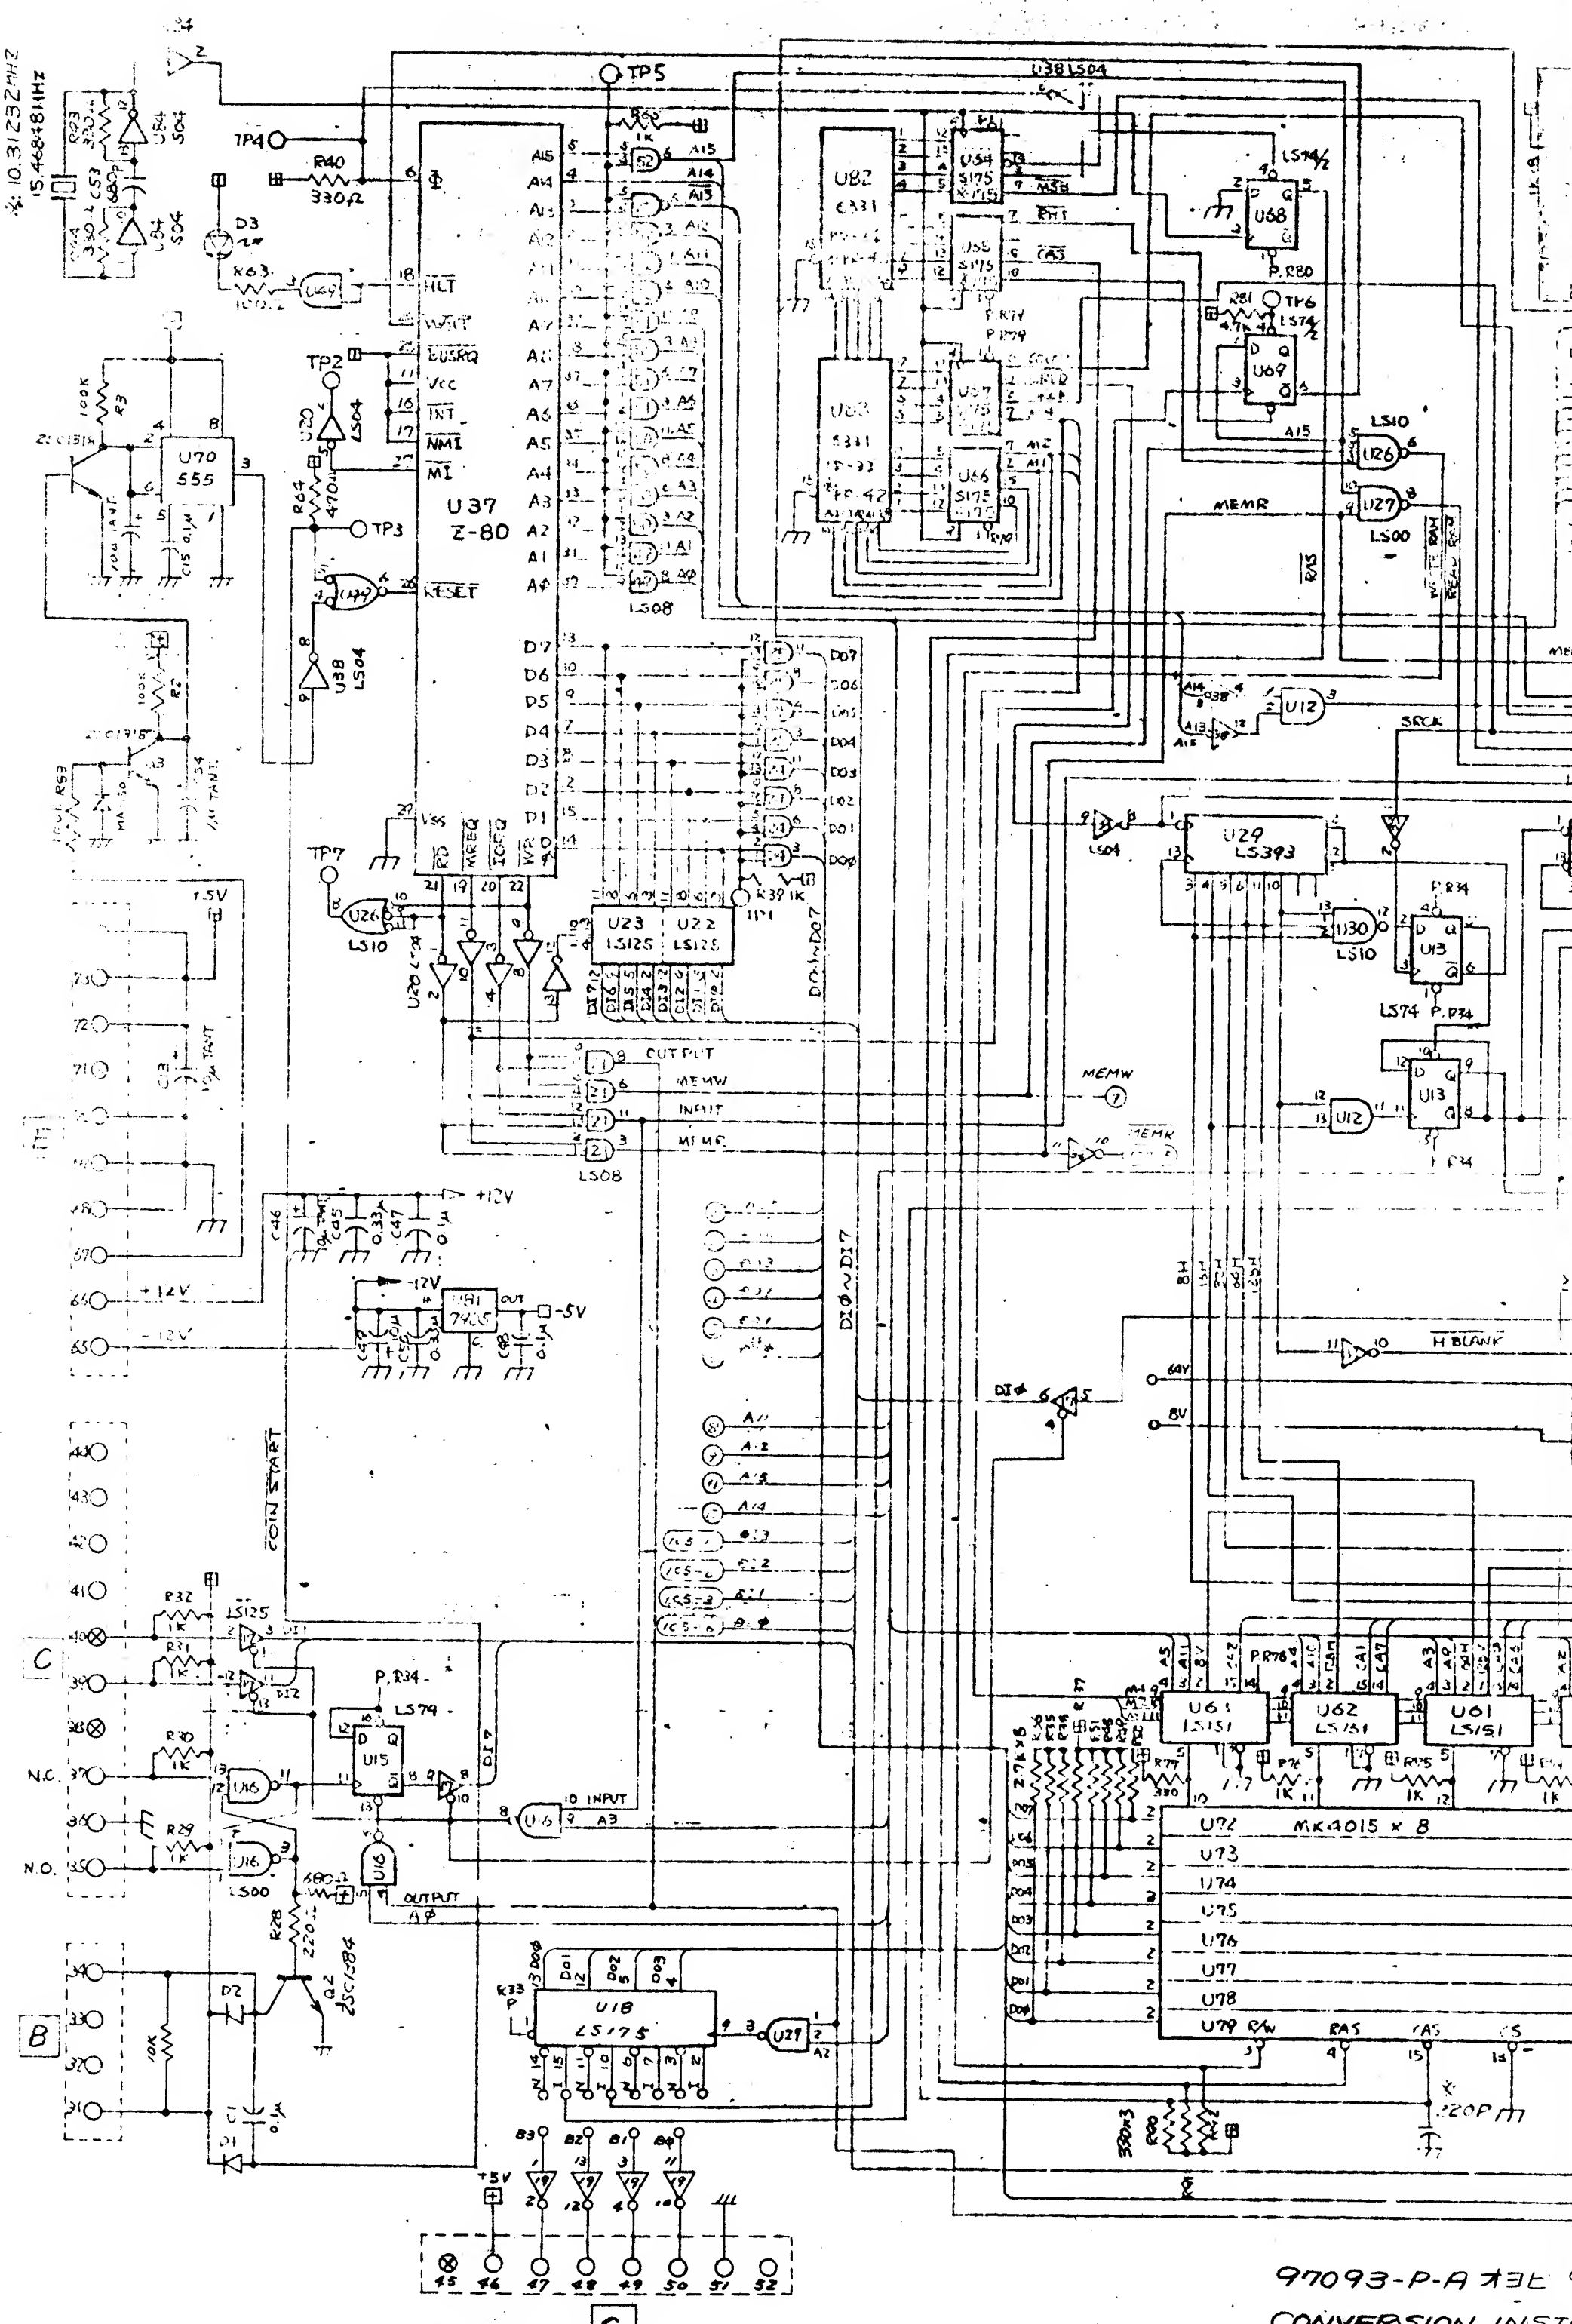

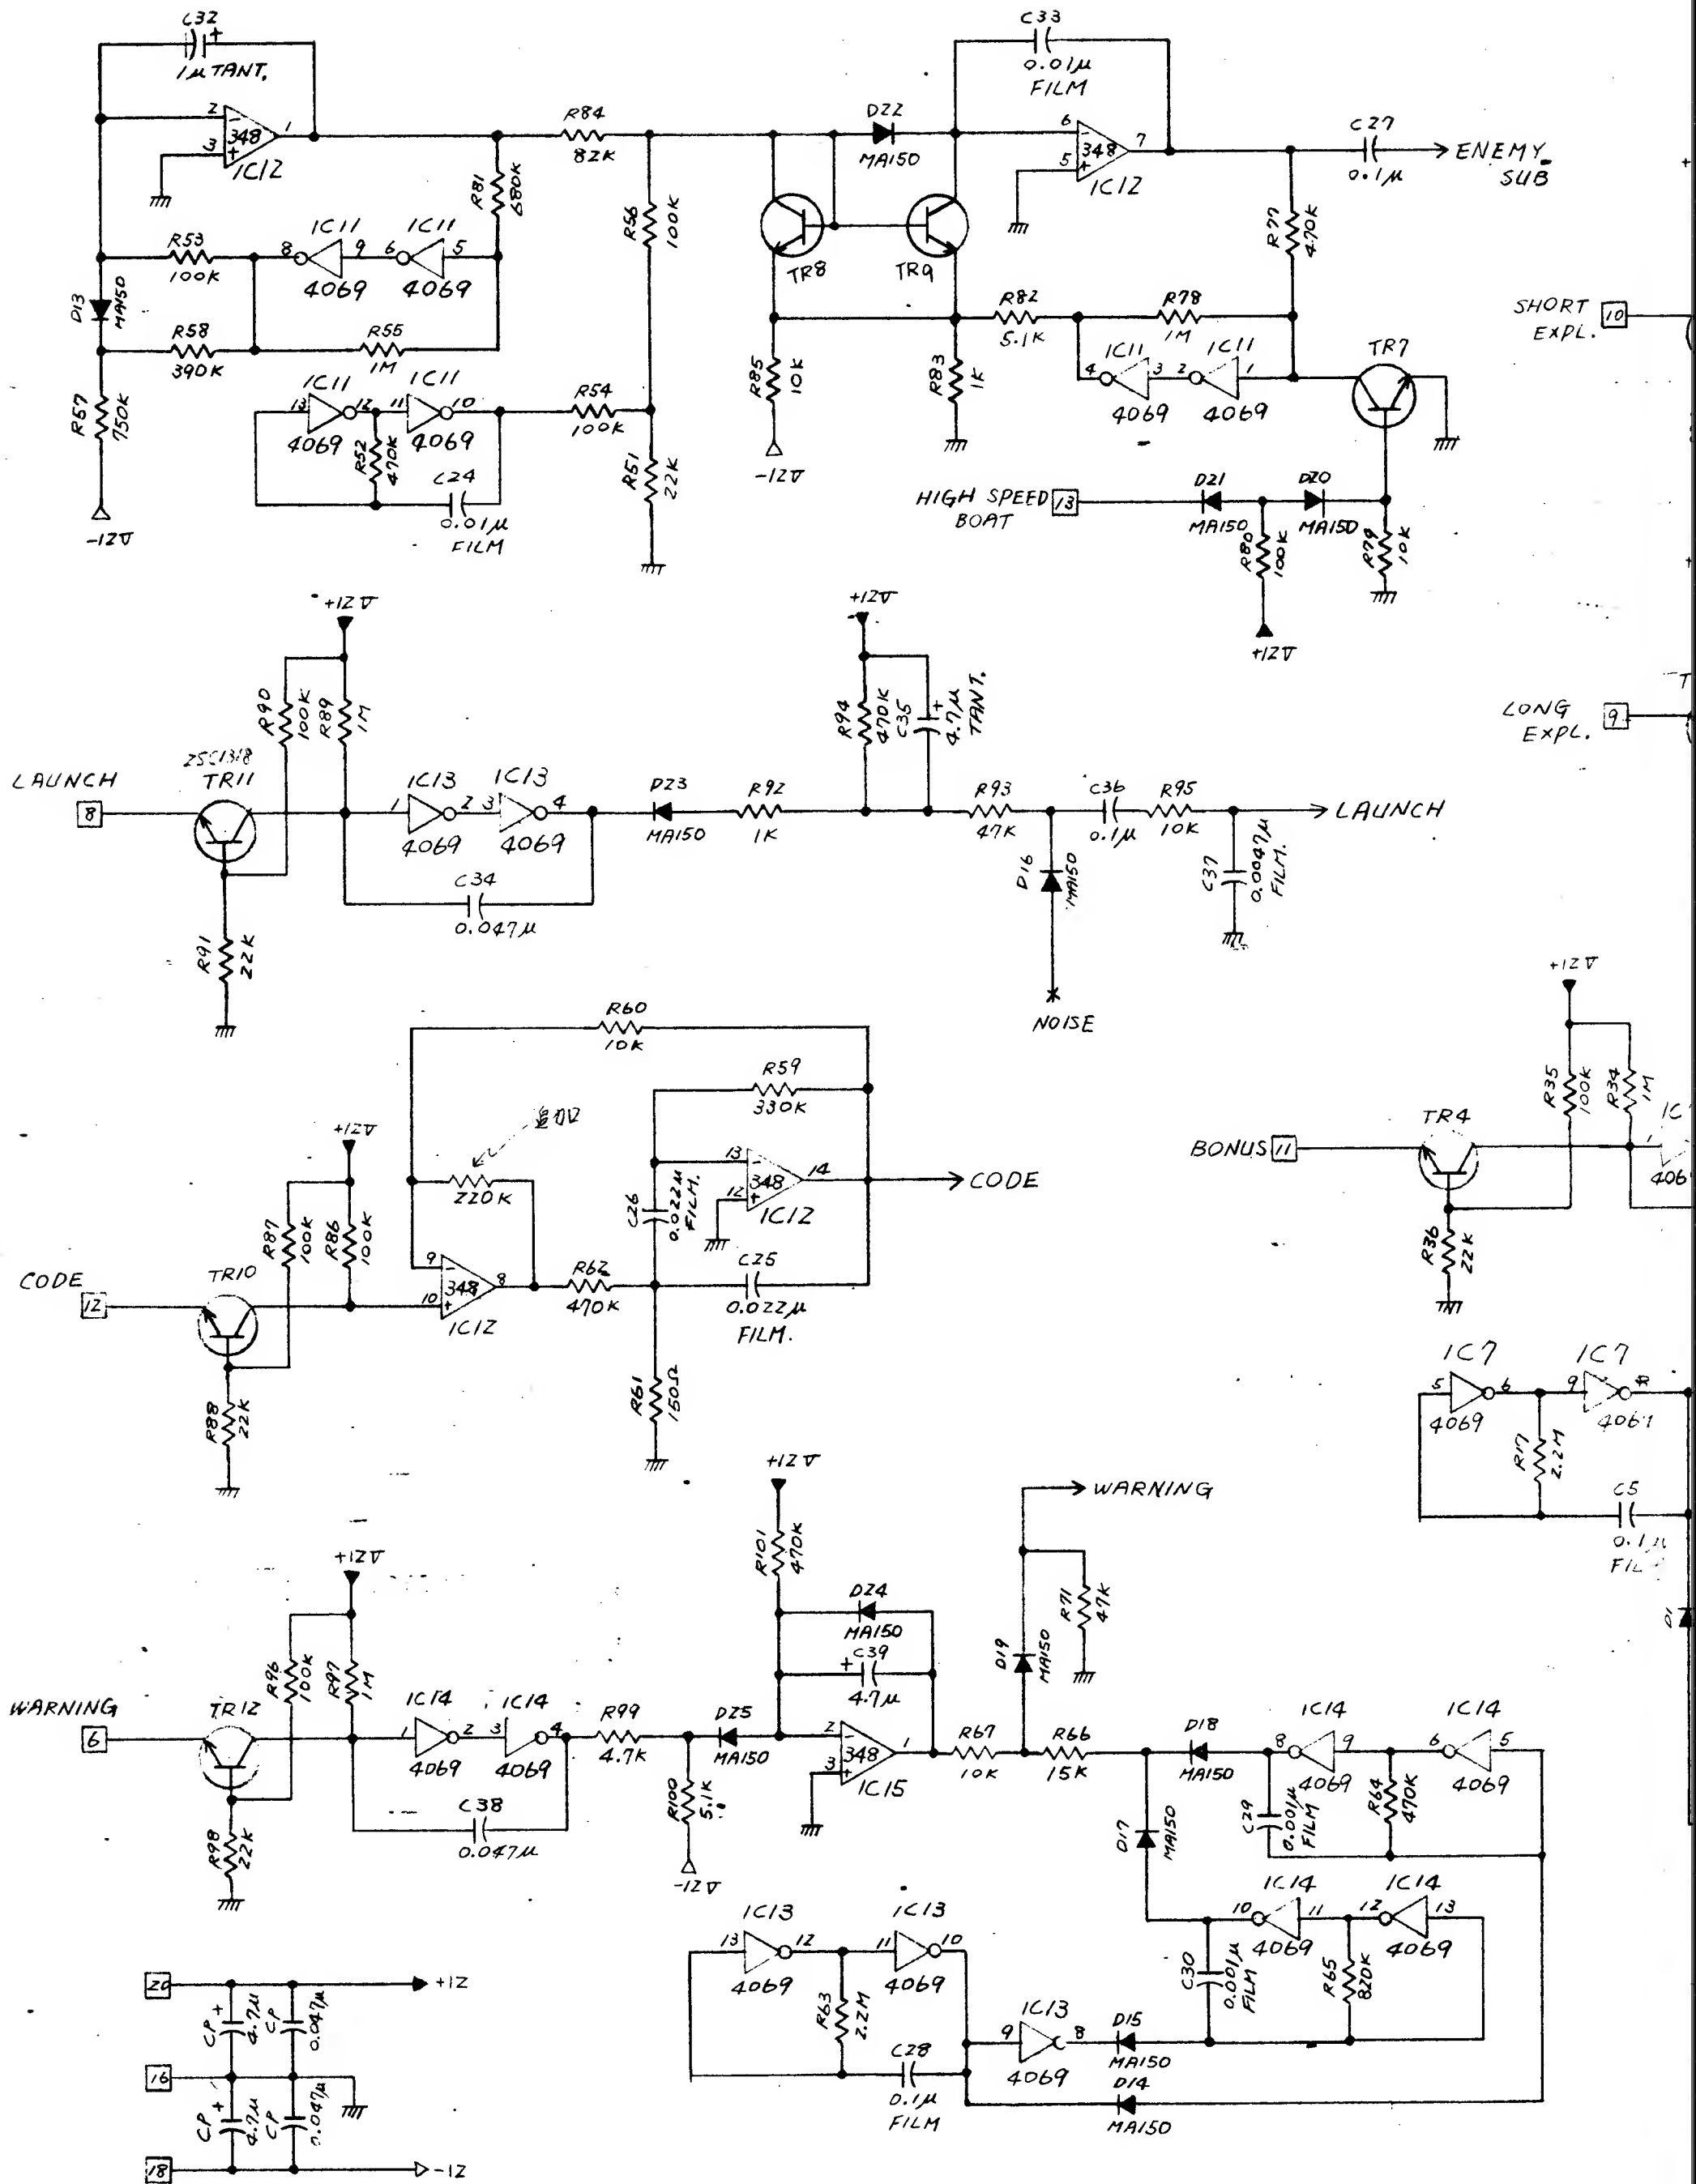

97271-P

OSCILL

